


6M21

PowerKit Variable Speed Engine

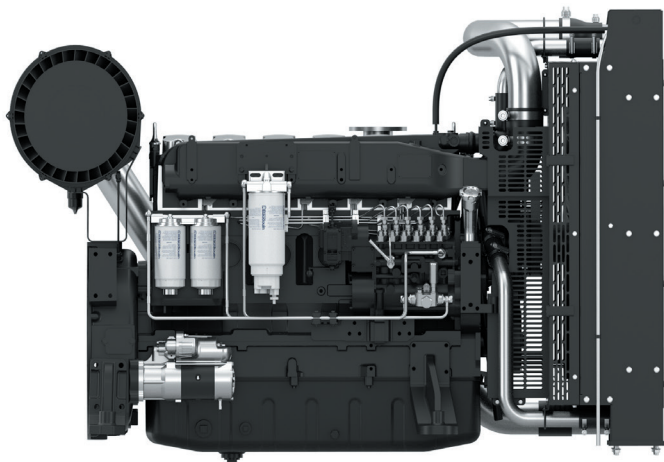

Bore x Stroke (mm)	127 x 165
Displacement (L)	12.5
N° of Cylinders	6
Cylinders Arrangement	In line
Fuel System	Mechanical Pump
Governor (Gov.)	Mechanical
Aspiration (Asp.)	T/A-A

Customer benefits

Variable speed engines optimised for use between 800 and 2200 Rpm
 Straightforward mechanical injection for easy maintenance
 Strong tolerance to varying fuel quality
 Peace of mind with best-in-class warranty of 2 years/2500 working hours

Variable Speed Engine					Coupling		
Model	Maximum Power KWm (HP)	Cylinders config.	Asp.	Displ.	Housing	Flywheel	Gov
6M21V2D0	370 (503)	6-inline	T/A-A	12.5	Sae 1	14"	Mech

Model		Engine max. gross power + Torque + Fuel Consumption														
		800 RPM	900 RPM	1000 RPM	1100 RPM	1200 RPM	1300 RPM	1400 RPM	1500 RPM	1600 RPM	1700 RPM	1800 RPM	1900 RPM	2000 RPM	2100 RPM	2200 RPM
6M21V2D0	kWm		157	188	213	266	293	314	335	352	352	370	370	370	371	370
	N.m		1668	1795	1847	1950	2002	2002	2002	1978	1980	1964	1862	1768	1687	1604
	gr/kWh		201	195	193	192	191	192	195	198	197	202	206	211	217	225

Standard equipment

Engine and block

Cast iron gantry type structure block
One-piece forged crankshaft
Separate cast iron cylinder heads and replaceable dry cylinder liners
Aluminum alloy pistons with oil cooling gallery

Cooling system

Radiator and hoses supplied directly mounted on the engine
Thermostatically-controlled system with belt driven coolant pump and pusher fan

Lubrication system

Flat bottom large capacity oil pan
Spin-on full-flow lube oil filter

Fuel system

Optimum performance and efficient use of fuel for continuous duty
Duplex fine filter for better efficiency

Air intake and exhaust system

Special rear mounted air filter with restriction indicator
Exhaust manifold shield for heat isolating

Electrical system

24V DC electric starter motor and battery charging alternator

Flywheel and housing


SAE 1 flywheel housing and 14" flywheel

Ratings definitions

Continuous Power (COP)

Power and/or speed are cyclic. The maximum time at rated load and speed is not to exceed 80%. Engine average load factor is to be <85%.

Dimensions and dry weight (mm/kg)

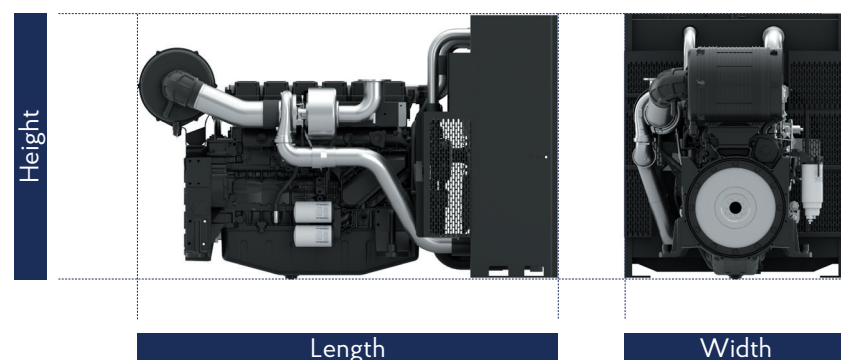

Variable Speed Engine	Dimensions and dry weights including radiator			
Model	L (mm)	W (mm)	H (mm)	Weight (Kg)
6M21V2D0	2163	1136	1359	1280