


# 6W105

Propulsion Diesel Engine

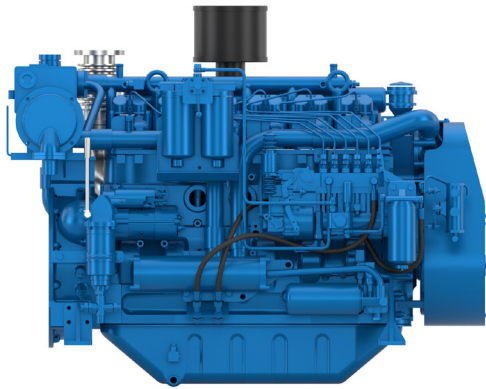

Number of cylinders	6 in line
Bore and stroke (mm)	105 X 130
Total displacement (L)	6.75
Compression ratio	18/1
Engine rotation	counter clockwise
Idle speed	700
Flywheel	SAE 3
Flywheel housing	SAE 11.5"

### Customer benefits

**Compact size** with one of the best in class power outputs

**Controlled fuel consumption** with low exhaust emissions at any running cycles

**Life cycle cost efficiency** with extended mean time between overhauls

**Easy maintenance** as the engine is equipped with simple mechanical injection

### Rated power - Fuel consumption

Duty	kW	HP	RPM	Fuel consumption			IMO	EPA
				Optimum value	Rated power			
					g/kWh	g/kWh		
P2	136	185	2100	198	211	34	II	-
P3	168	228	2425	193	216	43	II	-

	P2	P3
Application	Heavy	Intermittent
Engine load variations	Important	Important
Average Engine load factor	30-80%	60%
Annual working time	3000-5000h	1000-3000h
Time at full load	8h each 12h	2h each 12h

#### P1 Continuous Duty

- Deep sea trawlers
- Shrimps trawlers
- Sea going tug boats
- River tug boats
- Push boats
- Freighters
- Dredges
- LCT
- Ferries

#### P2 Heavy Duty

- Deep sea trawlers
- Shrimps trawlers
- Sea going tug boats
- River tug boats
- Push boats
- Freighters
- Dredges
- LCT
- Ferries

#### P3 Intermittent Duty

- Seasonal passenger vessels
- Fishing boats
- Pilot boats
- Commercial pleasure boats
- Pump boats
- Displacement sailboats
- Trawlers
- Bow thrusters


#### P4 Light Duty

- Private pleasure boats
- Multi-hull pleasure boats
- Survey or rescue fast vessels
- Military fast vessels.

#### P5 High performance Duty

- Private pleasure boats
- Multi-hull pleasure boats

## Dimensions and dry weight (mm/kg)

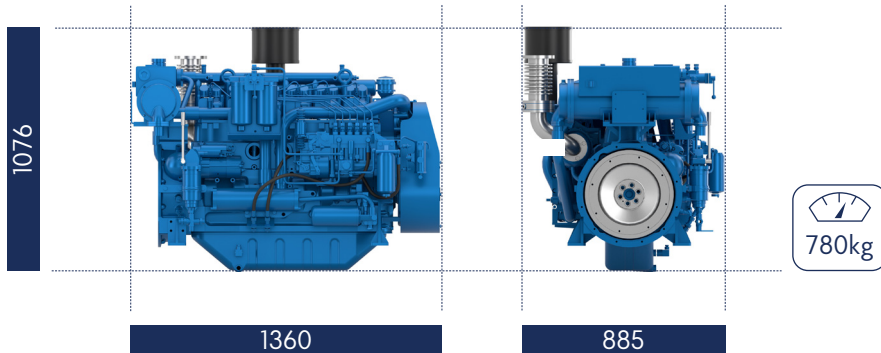

## Standard equipment

### Cooling System

Two - stage cooling circuit with built - in HT thermostatic valve  
Integrated fresh water expansion tank  
High efficiency tubular heat exchanger  
Belt driven centrifugal fresh water pump  
Self priming raw water pump with bronze impeller

### Lubrication System

Full flow lube oil filters duplex type  
Fresh water cooled lube oil heat exchanger

### Fuel System

Common-rail injection  
High pressure pump with shielded high pressure injection rail and pipes  
Fuel oil filter duplex type  
External fuel pre-filter with water separator

### Intake Air and Exhaust System

Double flow raw water cooled intake air heat exchanger module  
High efficiency dry turbocharger with ball bearing technology  
Two Stage Turbocharging system

### Electrical System


Voltage: 24V DC insulated  
Electrical starter  
200A battery alternator

### Optional Equipment


Wet exhaust  
PTO elastic coupling  
Additional pulley  
Electric drain system  
Standard PTO for hydraulic pump  
Different alternators possible - including 12V  
Electrical rotary actuator

## Performance

P2 - 136 kW - 185 hp @2100rpm

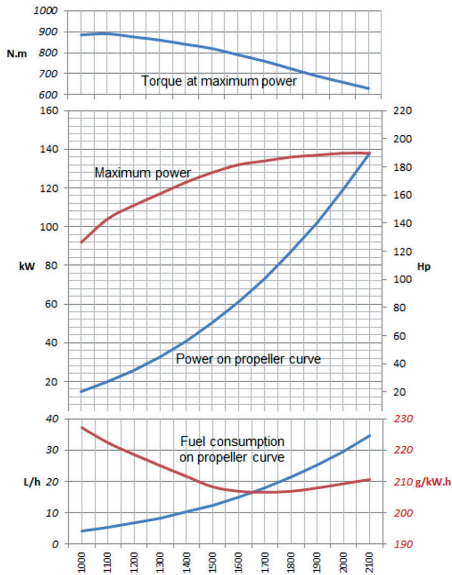

P3 - 168 kW - 228 hp @2425rpm

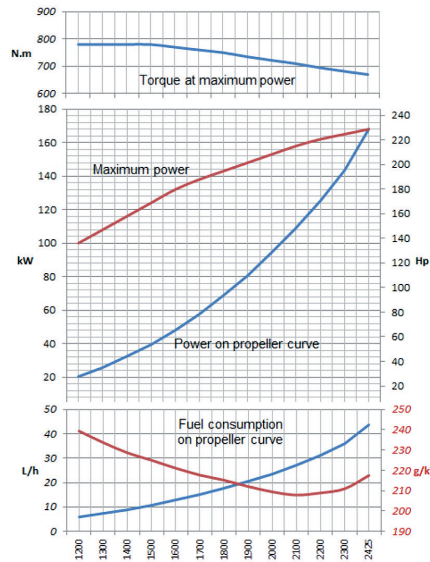

## Power definition

(Standard ISO 3046/1 - 1995 (F))

### Reference conditions

Ambient temperature	25°C / 77°F
Barometric pressure	100 kPa
Relative humidity	30%R
Raw water temperature	25°C / 77°F

### Fuel oil

Relative density	0,840 ± 0,005
Lower calorific power	42 700 kJ/kg
Consumption tolerances	+ 5%
	(DIN ISO 3046-1)
Inlet limit temperature	35°C / 95°F

**Our ratings also comply with classification societies maximum temperature definition without power derating.**

Ambient temperature	45°C / 113°F
Raw water temperature	32°C / 90°F