




6M26.3

IMO III EPA4 Stage V

Common rail injection

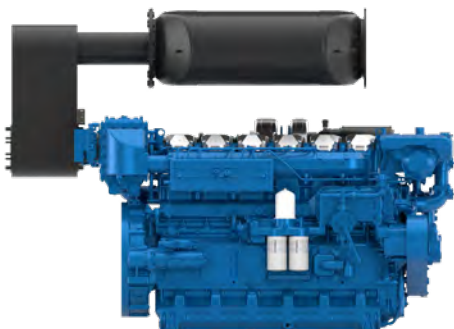

Number of cylinders	6 in line
Bore and stroke (mm)	150 X 150
Total displacement (L)	15.9
Cylinders	L6
Engine rotation	Counter clockwise
Idle speed	650
Flywheel	14"
Flywheel housing	SAE 1

Rated power - Fuel consumption

Duty	kW	HP	RPM	Fuel consumption (IMO/EPA)			IMO	EPA	EU
				Optimum value	Rated power				
				g/kWh	g/kWh	l/h			
P1	442	601	1800	200/201	201/208	106/109	III	4 (COM)	Stage V
P2	515	700	2000	200/214	207/214	127/131	III	4 (COM)	Stage V
P2	552	751	2100	201/220	217/221	143/145	III	4 (COM)	Stage V
P3	599	814	2100	200/209	225/230	160/164	III	4 (COM)	N/A

IMO II / EPA 3 versions are available without ATS

	P1	P2	P3
Application	Unrestricted Continuous	Continuous	Intermittent
Engine load variations	Very Little To None	Continuous	Important
Average Engine load factor	80-100%	30-80%	60%
Annual working time	More Than 5000 H	3000 -5000 H	1000 - 3000 H
Time at full load	Unlimited	8h Each 12h	2h Each 12h

P1 Continuous Duty

- Deep sea trawlers
- Shrimps trawlers
- Sea going tug boats
- River tug boats
- Push boats
- Freighters
- Dredges
- LCT
- Ferries

P2 Heavy Duty

- Deep sea trawlers
- Shrimps trawlers
- Sea going tug boats
- River tug boats
- Push boats
- Freighters
- Dredges
- LCT
- Ferries

P3 Intermittent Duty

- Seasonal passenger vessels
- Fishing boats
- Pilot boats
- Commercial pleasure boats
- Pump boats
- Displacement sailboats
- Trawlers
- Bow thrusters

P4 Light Duty

- Private pleasure boats
- Multi-hull pleasure boats
- Survey or rescue fast vessels
- Military fast vessels.


P5 High performance Duty

- Private pleasure boats
- Multi-hull pleasure boats

Baudouin's Engine DNA: Genuine Marine Power, Efficiency & Reliability

Our genuine marine engine design is specifically engineered for marine applications, ensuring durability, performance, and seamless integration in the most demanding environments. Designed for easy maintenance, our engines feature individual cylinder heads, allowing for quick servicing and minimal downtime to ensure uninterrupted operations. Built with key components made from highly durable materials, our engines guarantee long-term reliability and endurance in every condition.

Dimensions and dry weight (mm/kg)

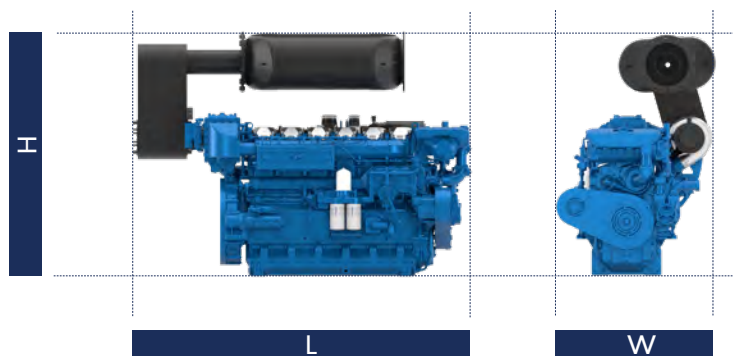

Model	L (mm)	W (mm)	H (mm)	Weight (Kg)
ENGINE ALONE	2102	1127	1229	2024
WITH SCR	2501	1282/1364	1826/1903	+195
WITH STAGE V	3397/5460/2835	1201/1220/1618	2734/1973/2689	+422

Adaptable Configurations



Over-gearbox installation (typical)



Over-engine installation (typical)



Stand-alone installation

Standard equipment

Cooling System

Two - stage cooling circuit with built - in HT thermostatic valve
Integrated fresh water expansion tank
High efficiency tubular heat exchanger
Gear driven centrifugal fresh water pump
Self priming raw water pump with bronze impeller

Lubrication System

Full flow lube oil filters duplex type
Fresh water cooled lube oil heat exchanger

Fuel System

Common-rail injection
High pressure pump with shielded high pressure injection rail and pipes
Fuel oil filter duplex type

Intake Air and Exhaust System

Double flow raw water cooled intake air heat exchanger module
High efficiency dry turbocharger with ball bearing technology

Electrical System


Voltage: 24V DC insulated
Electrical starter
175A battery alternator

Optional Equipment


External fuel pre-filter with water separator
Keel cooling
Wet exhaust
Additional pulley
Electric drain system
Standard PTO
Circuit breaker
Live PTO
Close crankcase ventilation
Air starter
Elastic Pads

Performance


P1 - 442 kW @1800rpm

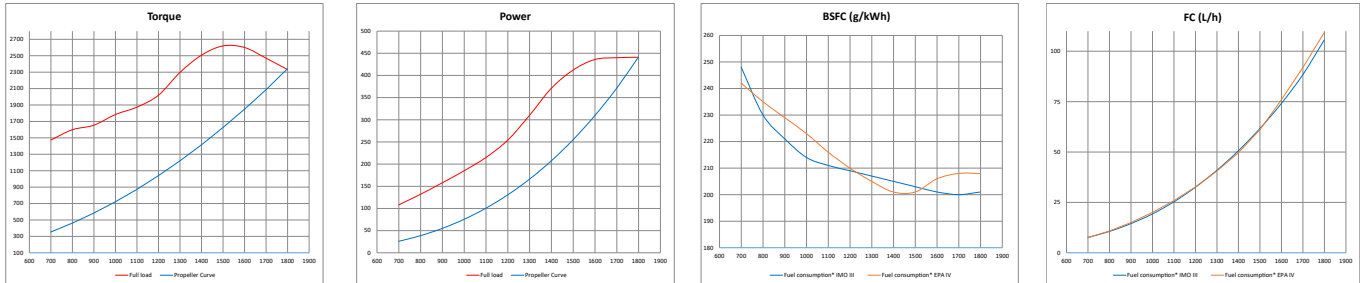


P2 - 515 kW @2000rpm

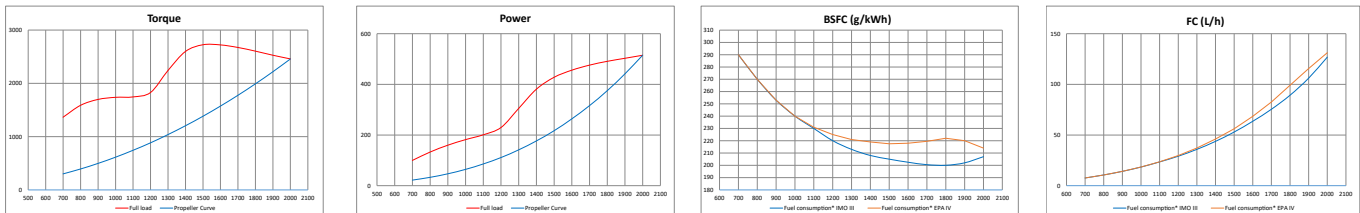

P2 - 552 kW @2100rpm

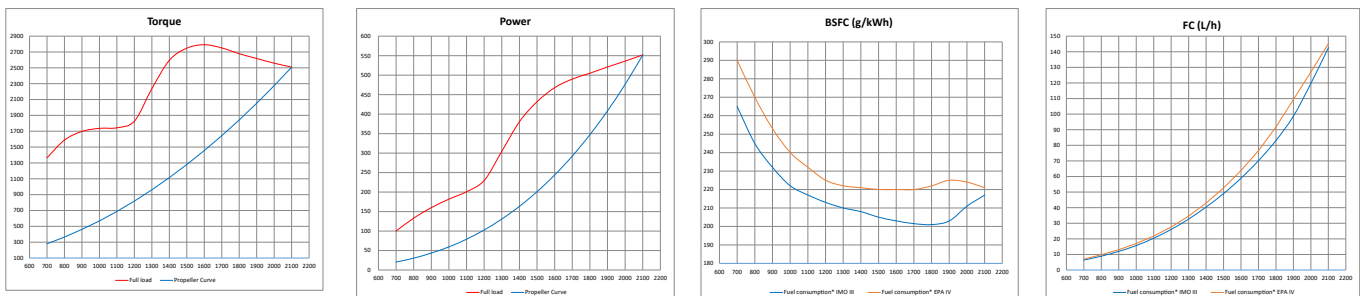

P3 - 599 kW @2100rpm

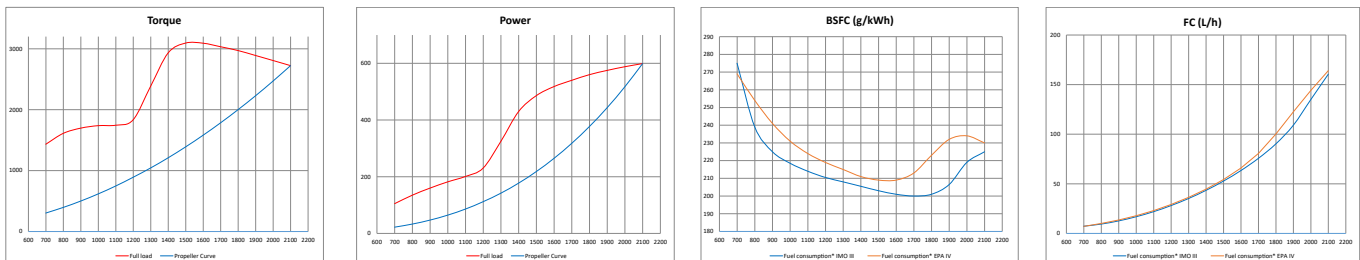

Power definition (Standard ISO 3046-1:2002)

Reference conditions

Ambient temperature	25°C / 77°F
Barometric pressure	100 kPa
Relative humidity	30%R
Raw water temperature	25°C / 77°F

Fuel oil

Relative density	0,840 ± 0,005
Lower calorific power	42 700 kJ/kg
Consumption tolerances	+ 5%
	(DIN ISO 3046-1)
Inlet limit temperature	35°C / 95°F

Our ratings also comply with classification societies maximum temperature definition without power derating.

Ambient temperature	45°C / 113°F
Raw water temperature	32°C / 90°F