




# 4W105

Auxiliary Diesel Engine

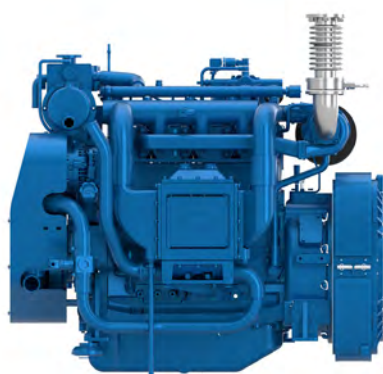

Number of cylinders	4
Bore and stroke (mm)	105 X 130
Total displacement (L)	4.5
Cylinders	L4
Engine rotation	Counter clockwise
Idle speed	700
Flywheel	SAE 3
Flywheel housing	SAE 11"5

4W105				Fuel Consumption		Emissions
Ratings	HP	kW (PRP)	RPM	g/kWh	l/h	IMO
PRP	122	90	1500	194	21	NA
PRP	141	104	1800	198	25	NA


### Generator Sets Engines

Power Class		Definition
PRP	Prime Power	Unrestricted running time Time at full load $\leq$ 500hrs/year Load variation $\leq$ 75% of rated power 10% overload 1hr/12hrs
ESP	Emergency Standby Power	Running time 200hrs/year max Load variation 110% of Prime power Average Load factor should not exceed 70% of the engine's ESP rating

### Baudouin's Engine DNA: Genuine Marine Power, Efficiency & Reliability

Our genuine marine engine design is specifically engineered for marine applications, ensuring durability, performance, and seamless integration in the most demanding environments. Designed for easy maintenance, our engines feature individual cylinder heads, allowing for quick servicing and minimal downtime to ensure uninterrupted operations. Built with key components made from highly durable materials, our engines guarantee long-term reliability and endurance in every condition.

## Dimensions and dry weight (mm/kg)

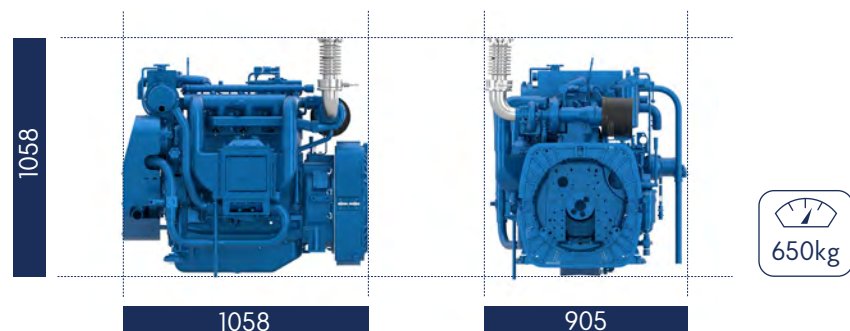

## Standard equipment

### Cooling System

Integrated fresh water expansion tank  
High efficiency tubular heat exchanger  
Gear driven centrifugal raw water pump  
Self priming raw water pump

### Lubrication System

Full flow lube oil filters simple type  
Fresh water cooled lube oil heat exchanger

### Fuel System

Mechanical injection  
Fuel oil filter duplex type  
External fuel pre-filter with water separator

### Intake Air and Exhaust System

Dry single stage turbocharger

### Electrical System

Voltage: 24V DC insulated  
Electrical starter

### Optional Equipment

Keel cooling configuration  
Elastic pads mounting  
Wet exhaust

## Power definition

(Standard Standard ISO 3046-1:2002)

### Reference conditions

Ambient temperature	25°C / 77°F
Barometric pressure	100 kPa
Relative humidity	30%R
Raw water temperature	25°C / 77°F

### Fuel oil

Relative density	0,840 ± 0,005
Lower calorific power	42 700 kJ/kg
Consumption tolerances	0 ± 5% (DIN ISO 3046-1)
Inlet limit temperature	35°C / 95°F

**Our ratings also comply with classification societies maximum temperature definition without power derating.**

Ambient temperature	45°C / 113°F
Raw water temperature	32°C / 90°F