


6W105ES

Emergency Marine Generator Set

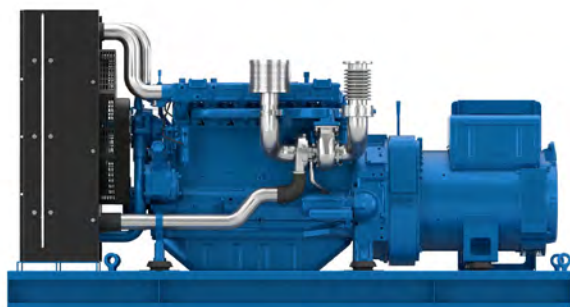

Number of cylinders	6
Bore and stroke (mm)	105 X 130
Total displacement (L)	6.7
Cylinders	L6
Engine rotation	Counter clockwise
Idle speed	650
Flywheel	SAE 3
Flywheel housing	11.5"

Ratings					Fuel Consumption						Emissions
					@ 100%		@ 75%		@ 50%		IMO
Rating	Hz	kVA	kWe	RPM	g/kWh	l/h	g/kWh	l/h	g/kWh	l/h	
ESP	50	165	132	1500	206	32	215	25	105	16	-
PRP	50	150	120	1500	216	31	225	24	114	18	II
ESP	60	170	136	1800	194	31	198	24	105	16	-
PRP	60	170	136	1800	200	32	208	25	116	18	II


Generator Sets & Auxiliary Engines

Power Class		Definition
PRP	Prime Power	Unrestricted running time Time at full load \leq 500hrs/year Load variation \leq 75% of rated power 10% overload 1hr/12hrs
ESP	Emergency Standby Power	Running time 200hrs/year max Load variation 110% of Prime power Average Load factor should not exceed 70% of the engine's ESP rating

Baudouin's Engine DNA: Genuine Marine Power, Efficiency & Reliability

Our genuine marine engine design is specifically engineered for marine applications, ensuring durability, performance, and seamless integration in the most demanding environments. Designed for easy maintenance, our engines feature individual cylinder heads, allowing for quick servicing and minimal downtime to ensure uninterrupted operations. Built with key components made from highly durable materials, our engines guarantee long-term reliability and endurance in every condition.

Dimensions and dry weight (mm/kg)

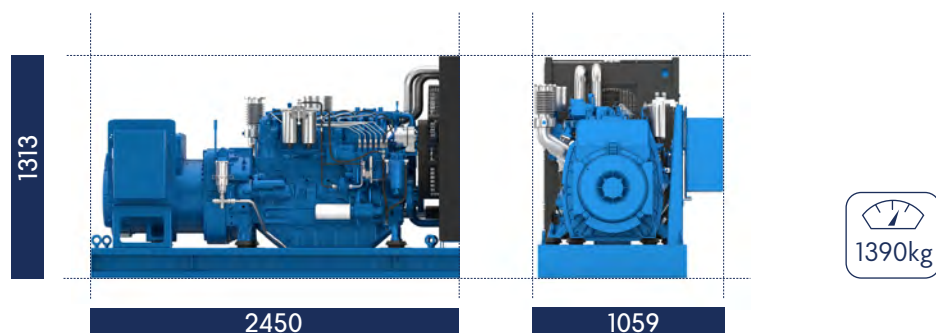

Standard equipment

Cooling System

Integrated fresh water expansion tank
High efficiency tubular heat exchanger
Radiator and fan

Lubrication System

Full flow lube oil filters simple type
Fresh water cooled lube oil heat exchanger

Fuel System

Mechanical injection
Fuel oil filter duplex type
External fuel pre-filter with water separator
Double wall injection bundle

Intake Air and Exhaust System

Dry single stage turbocharger

Electrical System

Voltage: 24V DC insulated
Double Electrical starter
55A battery charger

Generator

50/60 Hz frequency, 4 poles
Insulation / heating class H/H
Electronic voltage regulation
Brushless excitation
IP23 Protection, marine impregnation
Single bearing

Power definition

(Standard ISO 3046-1:2002)

Reference conditions

Ambient temperature	25°C / 77°F
Barometric pressure	100 kPa
Relative humidity	30%R
Raw water temperature	25°C / 77°F

Fuel oil

Relative density	0,840 ± 0,005
Lower calorific power	42 700 kJ/kg
Consumption tolerances	± 5%
Inlet limit temperature	35°C / 95°F

Our ratings also comply with classification societies maximum temperature definition without power derating.

Ambient temperature	45°C / 113°F
Raw water temperature	32°C / 90°F